


## HOC Connector Cleaner

The HOC Connector Cleaner is a high-performance device designed for cleaning the ferrule end face of 2.5mm based Hardened Fiber Optic Connector (HFOC). Please keep this instruction manual for future reference.

### 1. Safety precautions

	Though our device is deemed safe, improper usage or handling can still inflict injury to others.
	Connector Cleaner HOC is designed to clean TITAN RTD® /TRIDENT® Hardened Fiber Optic connector (HFOC) and SC Connector.

### 2. Notes on usage


Do not attempt to disassemble as this can cause damage to the device.  
Do not re-use cleaning cloth as this will eliminate its cleaning ability.  
Do not touch the cleaning cloth as this will cause contamination.  
Do not pull the cleaning cloth, use only the device body.  
Do not use this cleaner when the cloth is empty, as this can cause damage to the connector.

### 3. Notes on storage for extended periods

Do not expose device to direct sunlight, high temperature or high humidity.  
The cover on the guide cap should be always closed when device is not in use.

## HOC Connector Cleaner


### 4. Device construction

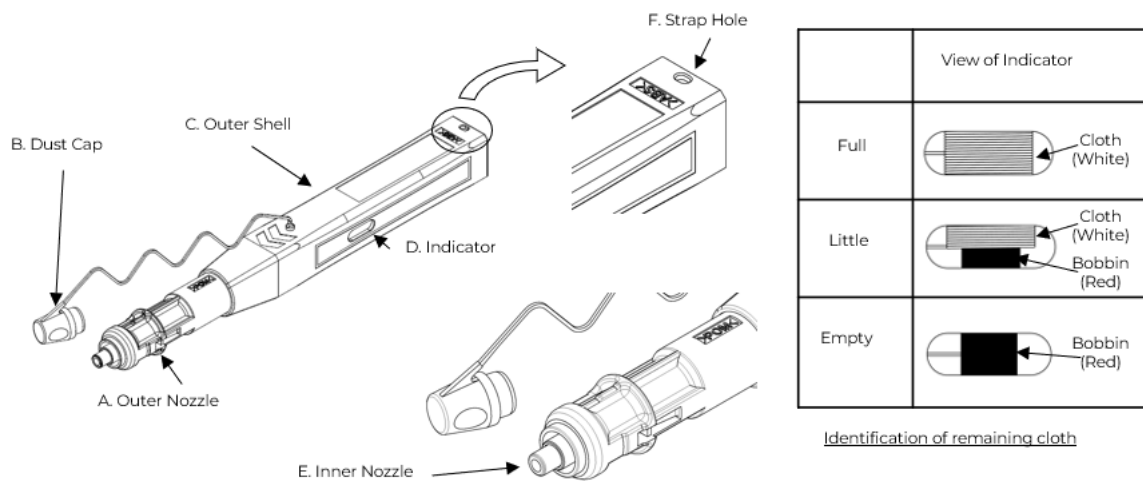


No	Part Name	Function
A	Outer Nozzle	Aligns the cleaning cloth to the connector end face when cleaning through the connector adapter.
B	Dust Cap	Acts as the cap.
C	Outer Shell	Houses cleaning cloth and pushed forward to clean the connector.
D	Indicator	Provides indication of remaining cleaning cloth.
E	Inner Nozzle	Aligns the cleaning cloth to the connector end face when cleaning the connector plug.
F	Strap Hole	Can be used to attach a strap to the cleaner (strap not included).

## Connector inside adapter

### Step 1 - Remove dust cap from the device

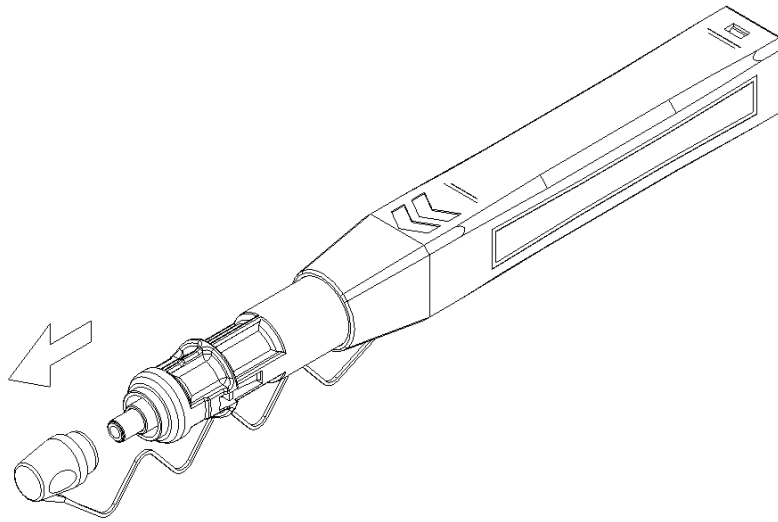


### Step 2 – Insert the target connector adapter into the Guide Nozzle

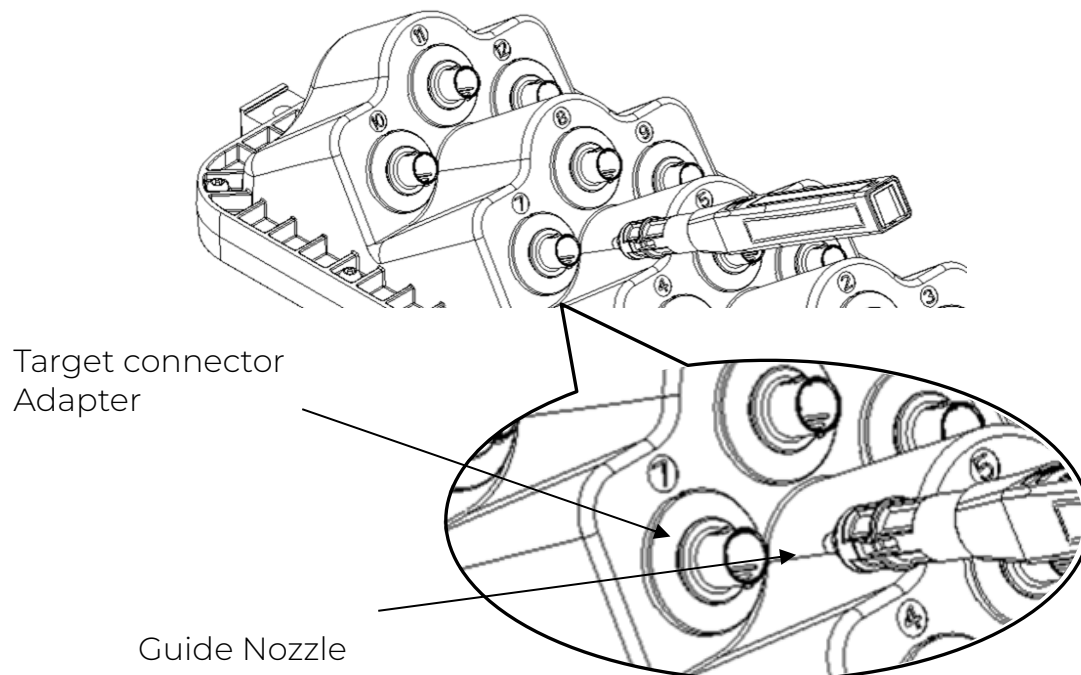

## Connector inside adapter

### Step 3

Push the Outer Shell to start cleaning the target connector end face. A “click” sound indicates end of cleaning process. Close the cover after use.

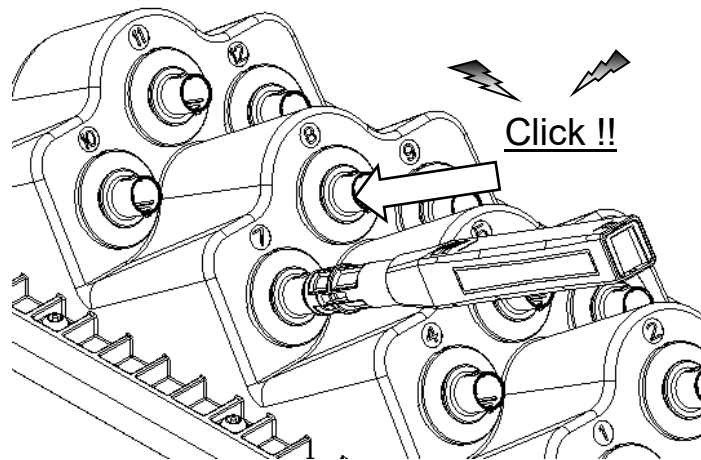


Be careful not to slant the HOC Connector Cleaner while inserting into the adapter/ connector.


Do not overly exert force during insertion as this may cause damage to both the connector and the HOC Connector Cleaner.

## Connector plugs alone

### Step 1 – Remove dust cap from the device

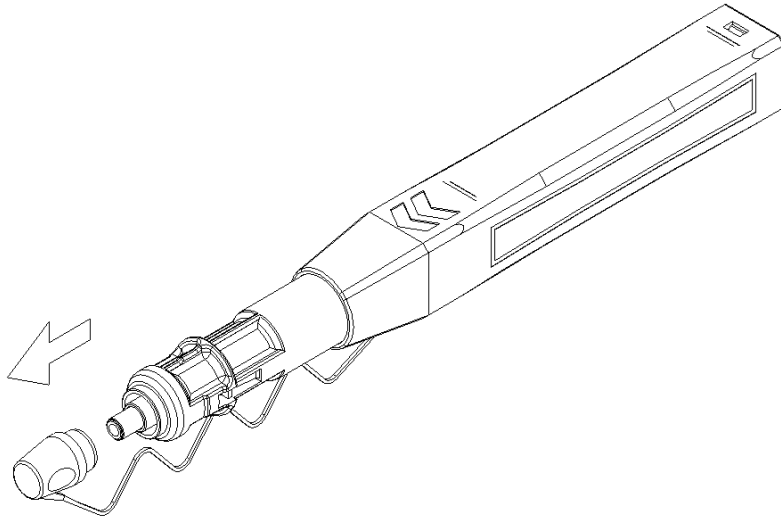


### Step 2 – Insert the target connector into the Inner Nozzle

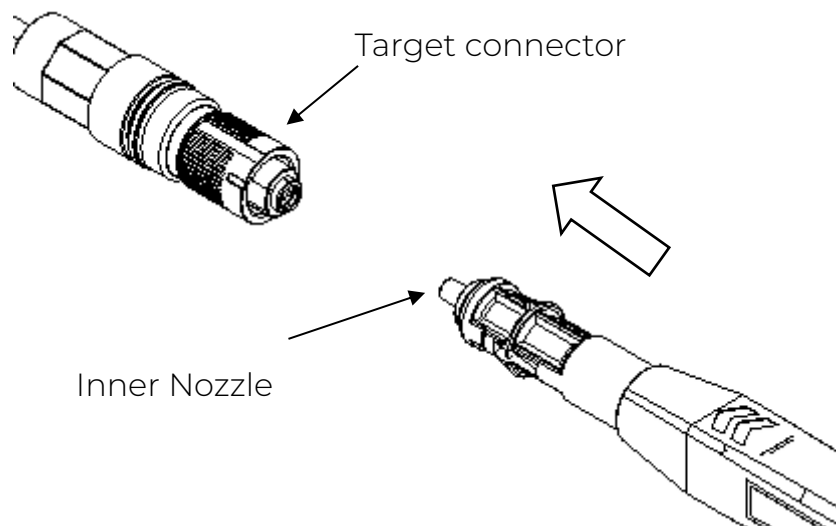

## Connector plugs alone

### Step 3

Push the Outer Shell to start cleaning the target connector end face. A “click” sound indicates end of cleaning process. Close the cover after use.

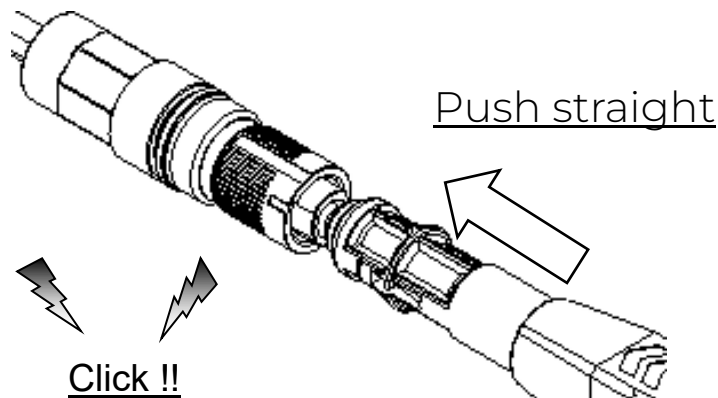

Be careful not to slant the HOC Connector Cleaner while inserting into the adapter/ connector.

Do not overly exert force during insertion as this may cause damage to both the connector and the HOC Connector Cleaner.