

Installation Procedure for fitting an OptiTap® Port into xMJ Closure

Product Application

This instruction details the installation procedure to install an OptiTap® Port and pigtail into an xMJ closure.

Precautions and Warnings

- ! This guide is only valid for products purchased from or approved by Prysmian Group.
- ! During this procedure all local Health & Safety statutory regulations must be adhered to.
- ! This installation should only be carried out by suitably trained competent persons.

Parts List

OptiTap® Port Adapter



This is a port adapter for the xMJ base with an OptiTap® adapter fitted.

Pigtail (Blue)



Standard SC/APC Pigtail

Clear Silicone Tube



Silicone tube use to protect the pigtail when going into the mandrel.

Installing the OptiTap® Port and Pigtail.

Step 1



The xMJ base with port blanks fitted.

Step 2



Remove the clamp and cover. Lift the trays up to give access to the inside of the base.

Step 3



Push the tabs inwards and down on the port blank to remove it.

Step 4



See Step 3.

Step 5

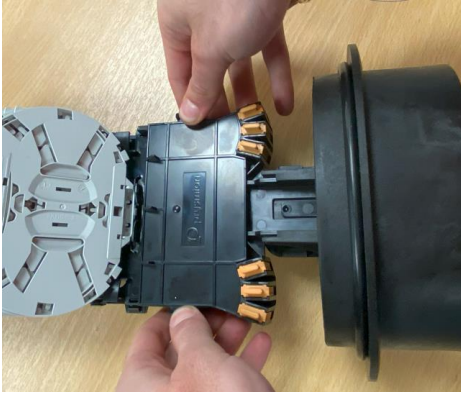


Put a small amount of silicone grease on the O-ring around the adapter body and insert the OptiTap® Port into the vacant hole. Ensure that the locating pips on the port body line up with the locating recess in the base. Push in until you hear a click.

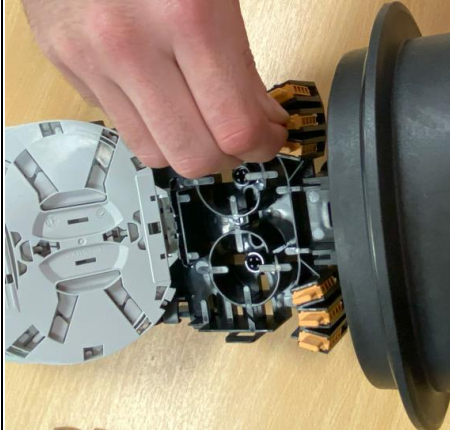
Step 6



The OptiTap® Port is assembled correctly when there isn't a gap between the base and the OptiTap® body.

Step 7

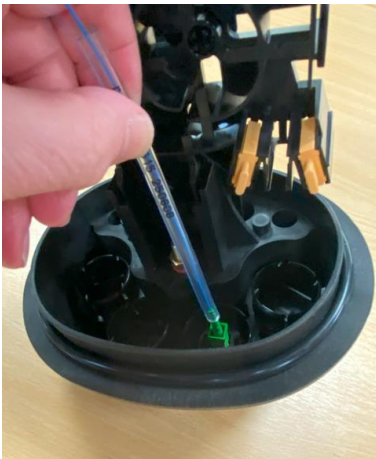
Remove the mandrel cover by pushing apart the tabs on the sides.

Step 8

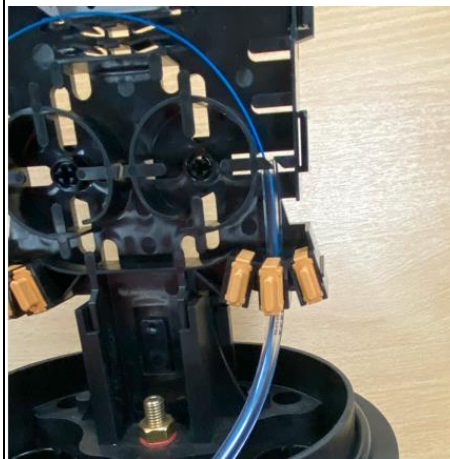
Remove the required cable clamp.

Step 9

Remove the dust cap from the end of the OptiTap® adapter. Remove the dust cap from the end of the SC connector on the pigtail. Insert the pigtail connector into the OptiTap® adapter ensuring the locating rib lines up with the slot in the adapter.

Step 10

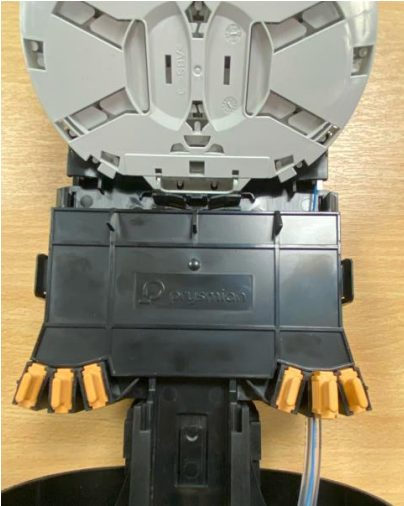
Slide the silicone tube over the pigtail until it touches the boot.

Step 11

Place the tube into the cable slot and mandrel and replace the cable clamp.

Step 12

Route the pigtail through the fibre channel up to the required tray. The fibre sheath should be stripped at the tray and stored according to local work instruction.

Step 13

Replace the mandrel cover.

Step 14

Place the trays back to their resting position.

Step 15

Place the cap back onto the base and close up using the clamp ring.

*OptiTap® is a registered trademark of Corning.

INSTALLATION INSTRUCTION

Copyright Prysmian - 2024 You may not copy, reprint, or reproduce in any form the content, either wholly or in part, of this Installation Guide, without the written permission of the copyright owner. Specifications are for product as supplied by Prysmian: any modification or alteration afterwards of product may give different result. The information is believed to be correct at the time of issue. Prysmian reserves the right to amend the information within this Installation Guide without prior notice. This Installation Guide may include inaccuracies, omissions of content and of information and is not contractually valid unless specifically authorised by Prysmian. Property of Prysmian UK - Uncontrolled when printed Prysmian Cables & Systems Limited, Chickenhall Lane, Eastleigh, Hampshire, SO50 6YU, United Kingdom.

PRYSMIAN HELPLINE: + 44 (0) 7816191633
[connectivity.helpline@prysmian.com](mailto:connectivity.helpline@prysmiangroup.com)

Contact Information

	Office	Telephone Fax	email
ASEAN	Singapore	T : +65 6898 3633 T : +65 6265 0707	sales.asean@prysmiangroup.com
AUSTRALIA	Liverpool	T: 1300 300 304 F : 1300 300 307	sales.telecom.au@prysmiangroup.com
CHINA	Wuxi	T : +86 510 68069518 F: +86 510 68069559	tls.china@prysmiangroup.com
DANUBIAN	Slatina	T : +40-349-406.628 F : +40-349-433.484	customercare.romania@prysmiangroup.com
FRANCE	Champs-Sur-Marne	T : +33 1 69 67 72 80	telecom.fr@prysmiangroup.com
ITALIA	Milano	T: +3964493939 F: +3964499264	pqa@prysmiangroup.com
LATAM	Sorocaba	T: +55 15 3212 6801 F: +55 15 3212 6814	sales.telecom.br@prysmiangroup.com
MIDDLE EAST	Dubai	T : +971 4 368 8682 F : +971 4 368 8683	dubaioffice@prysmiancables-me.com
NORDICS	Malmö	T : +46 380 554 265	info.nordic@prysmiangroup.com
NORTH AMERICA	Lexington	T : 800 669 0808	comm.cables@prysmiangroup.com
OPGW & SPECIALS	Vilanova	T: +34 93 811 6181 F: + 34 93 811 6031	opgw@prysmiangroup.com
RUSSIA	Moscow	T: +7 495 777 80 86 F: +7 495 777 80 89	info.ru@prysmiangroup.com
SPAIN & AFRICA	Maliaño	T: +34 942247118 F: +34 942247114	santander.bo@prysmiangroup.com
TURKEY	Istanbul		tpks@prysmiangroup.com
UK	Eastleigh	T: +44 2380 295 000	sales.telecom.uk@prysmiangroup.com